
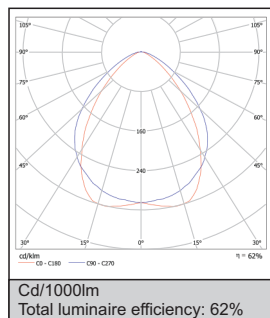
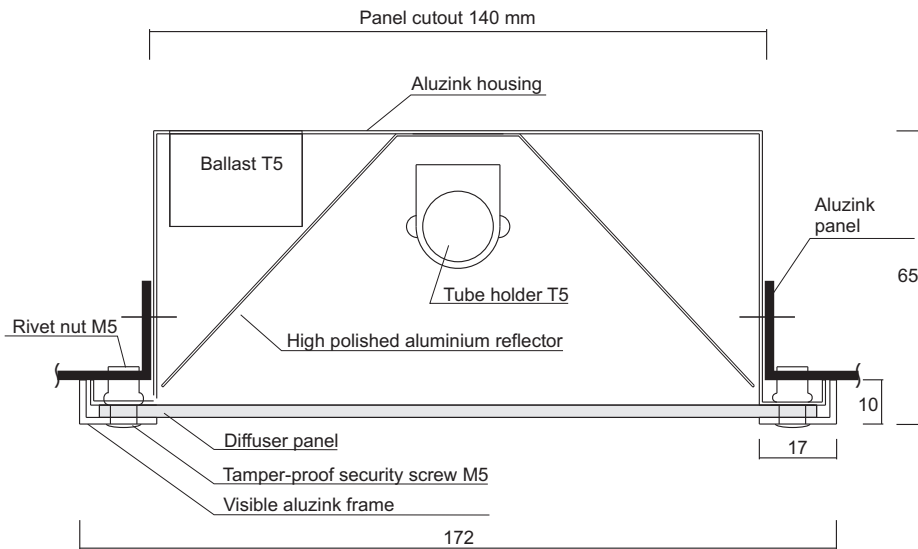


# Itaab Safe

## Security lighting

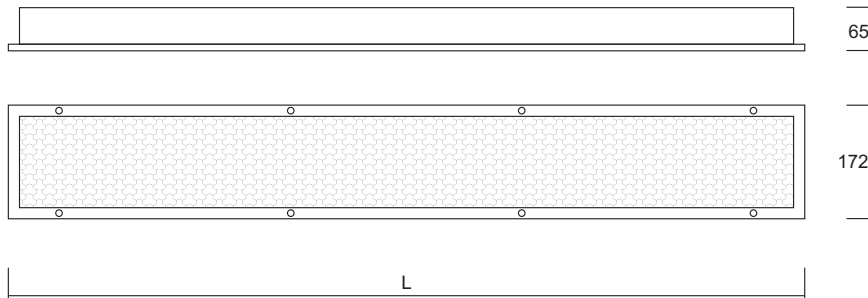

Article no.	Model	Wattage [W]	Length [mm]	Width [mm]	Height [mm]	Weight [kg]	Qty./carton
S1-21	Itaab Safe T5 21W HF	21	905	172	65	3,1	1
S1-28	Itaab Safe T5 28W HF	28	1205	172	65	4,2	1
S1-35	Itaab Safe T5 35W HF	35	1505	172	65	5,2	1

Dimensions and specifications are subject to change without notification.

### Specifications:

**Recessed luminaire T5**  
For Itaab security panel.

### Design

Housing and frame manufactured of aluzink. High polished aluminium reflector. Impact-resistant polycarbonate diffuser. Halogen-free cable. Internal, 1,5mm<sup>2</sup> extension cables..

### Mounting/ Installation:

Suitable for mounting in Itaab security panel or or Itab school panel.

Connect to 220-240V, 50-60Hz mains using white, 2,5m/3x0.75mm<sup>2</sup> power cord (included).

Optional Wieland Mini 3/5-pole quick-coupling system available as accessory.

### Dimming:

Analogue 1-10V, DSI, phase control (impulse), DALI.

### Accessories:

T5 lamps  
Quick-coupling system Wieland Mini 3/5-pole start cable Wieland Mini 3/5-pole extension cable Wieland Mini Microprismatic polycarbonate diffuser

*NB! tc point on ballast temperature may not exceed 80°C.*

*Placement: free air circulation possible around entire luminaire. Ballast specified for ambient temperature of -25° - +60°C.*

CE  IP40



Box 1211  
S-701 12 Örebro  
Sweden  
Tel: +46 19- 22 51 90  
Fax: +46 19- 22 56 44  
info@itaab.com  
[www.itaab.com](http://www.itaab.com)